


Remove Water and Dirt from Oils, Fuels and Gases

- Removes free and emulsified water to less than 2 ppm
- Differential pressure increase alerts operator to change cartridges
- Effectively filters silt and other particulates
- No media migration or “linting”
- Easy to install and remove
- Does not affect oil additives
- Fits standard filter housings

Aquacon® Cartridges have a patented* construction for removing dirt and water from hydrocarbon and other oils as well as gases. The outer media layer filters out silt, rust and other particulate contaminants. The inner layers absorb water and chemically bond it so that no water will release downstream.

When the **Aquacon** Cartridge reaches its water holding limit, the media swells shut and the differential pressure rapidly increases. This signals the operator that the cartridge must be changed.

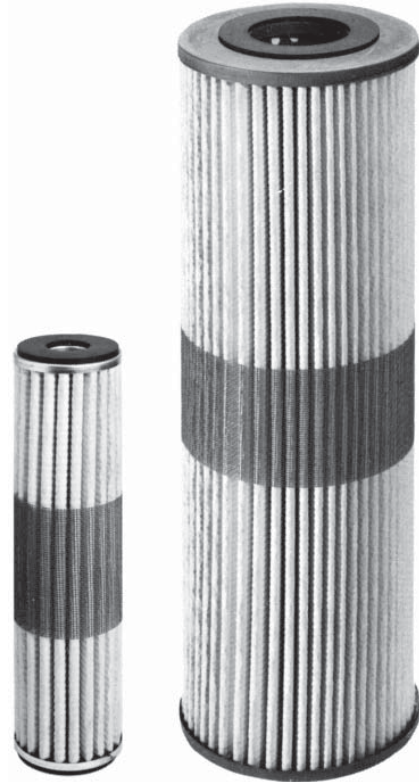

APPLICATIONS

Gasoline	Hydraulic Oil
Kerosene	Turbine Lube Oil
Diesel Fuel	Quench Oil
Insulating Oil	Synthetic Oil
Biodiesel	Phosphate Ester Oil

TECHNICAL INFORMATION

1. Maximum operating temperature is 250°F.
2. **Aquacon** Cartridges will shut off flow when loaded with water or dirt. Appropriate precautions should be taken in critical applications where oil flow must be maintained.
3. With some lube and hydraulic oils all of the water may not be removed in one pass, and extra passes will be required for total removal.
4. Water capacity for the AC-718 cartridges ranges from 2 to 4 quarts.

WARNING: Absorbent-type monitor cartridges will not remove water from fuel containing alcohol-blending agents (commonly called gasohol). For removal of solids, please use Velcon particle removal filters specifically made for gasohol. Consult your Velcon representative.

CARTRIDGE INFORMATION


New types of **Aquacon**® Cartridges are being introduced continually. Contact your local Velcon Representative for up-to-date information.

Model Number	Micrometer Rating		I.D. Inches	O.D. Inches	Length Inches	Collapse Pressure, psi	Interchange Information
	Nominal	Beta _x =75					
AC-21005 ⁽¹⁾	5	40	1	2 ⁵ / ₈	9 ³ / ₄	75	Fits Velcon VF-31 Housings
AC-5121/2E ⁽²⁾ AC-51205	0.5 5	3 40	1 ⁷ / ₈ 1 ⁷ / ₈	5 ⁵ / ₈ 5 ⁵ / ₈	12 ¹ / ₈ 12 ¹ / ₈	75 75	Fits Velcon VF-61 Housings
AC-61405 AC-62905 AC-64405	5 5 5	40 40 40	3 ¹ / ₂ 3 ¹ / ₂ 3 ¹ / ₂	6 6 6	14 ¹ / ₂ 29 ¹ / ₂ 44	100 100 100	Interchanges with Velcon FO-614PLF, FO-629PLF, and FO-644PLF Series Cartridges
AC-718P3 ⁽²⁾ AC-718P4D AC-7181/2 ⁽²⁾ AC-71801 AC-71805 AC-7361/2 ⁽²⁾ AC-73601 AC-73605	0.3 0.4 0.5 1 5 0.5 1 5	2 2.5 3 6 40 3 6 40	2 ⁹ / ₁₆ 2 ⁹ / ₁₆ 2 ⁹ / ₁₆ 2 ⁹ / ₁₆ 2 ⁹ / ₁₆ 2 ⁹ / ₁₆ 2 ⁹ / ₁₆ 2 ⁹ / ₁₆	6 ¹ / ₄ 6 ¹ / ₄ 6 ¹ / ₄ 6 ¹ / ₄ 6 ¹ / ₄ 6 ¹ / ₄ 6 ¹ / ₄ 6 ¹ / ₄	18 18 18 18 18 36 36 36	75 75 75 75 75 75 75 75	Fits Velcon industrial housings and portable filters, interchangeable with Velcon FO-718PL and FO-736PL Series Cartridges

Notes: (1) The AC-21005 will fit into many existing housings that take "string-wound" cartridges. Check to confirm that the 9³/₄" length will seat properly in the housing.

(2) The AC-5121/2E, AC-718P3, AC-7181/2 and AC-7361/2 are increased surface area/reduced water capacity cartridges specifically designed for circuit breaker oil.

TYPICAL Aquacon® CARTRIDGE CONSTRUCTION

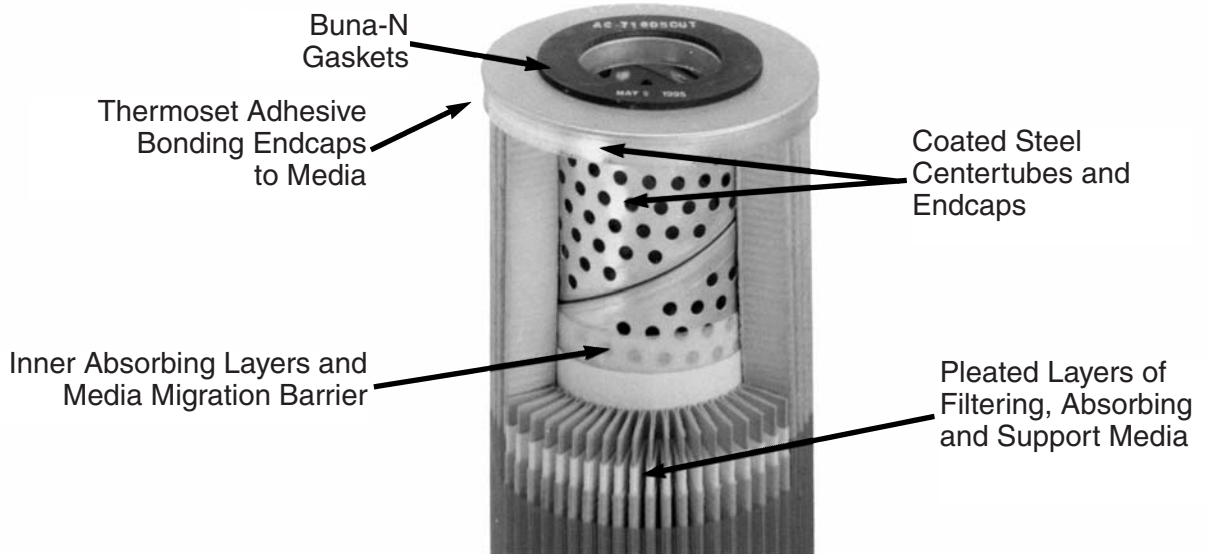

Velcon products are sold and serviced by a world-wide representative network. To order, contact Headquarters or your LOCAL REPRESENTATIVE:

COMPANY HEADQUARTERS:
Velcon Filters, Inc.
1210 Garden of the Gods Road
Colorado Springs, CO 80907-3410
Phone: 1.800.531.0180 / 1.719.531.5855
Fax: 719.531.5690
e-mail: vfsales@velcon.com
www.velcon.com

MANUFACTURING PLANTS LOCATED AT:
Colorado Springs, Colorado
Sylacauga, Alabama

OVERSEAS AFFILIATES:
Frankfurt/M., Germany & Singapore

**Liquid Filtration
and Separation
Specialists**